


## CLEARANCE DIMENSIONS: INSWING AND OUTSWING

**DO NOT COVER MORE THAN  $\frac{3}{8}$ " OF THE FRAME ON JAMBS**

**PROVIDE MINIMUM  $\frac{1}{4}$ " CLEARANCE BETWEEN FINISH MATERIAL AND HINGES**

FINISH MATERIAL  
FRAME COVERAGE  
MAXIMUM:  $\frac{5}{8}$ "

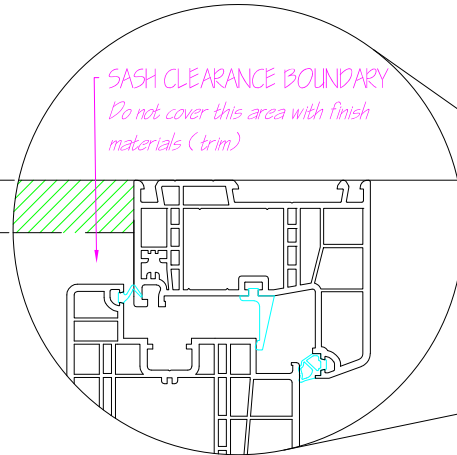


ROUGH OPENING  
MAXIMUM:  $\frac{1}{2}$ "

ROUGH OPENING  
MINIMUM:  $\frac{3}{8}$ "

FINISH MATERIAL  
FRAME COVERAGE  
MAXIMUM:  $\frac{3}{8}$ "

CLEARANCE  
BOUNDARY:  $\frac{1}{4}$ "

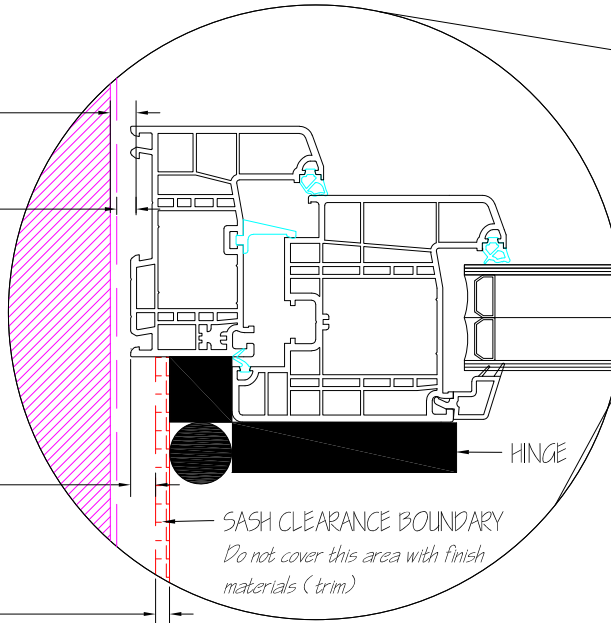

SASH CLEARANCE BOUNDARY  
*Do not cover any part of low profile threshold with interior finish materials (flooring)*

$\frac{3}{8}$ "  
ROUGH OPENING  
SHIM MAX.:  $\frac{1}{8}$ "

SILL HEIGHT:  $\frac{13}{16}$ "

← SWING

