


HINGE-SIDE SASH CLEARANCE BOUNDARY
- COVER FRAME 1/4" MAXIMUM ON HINGE-SIDE

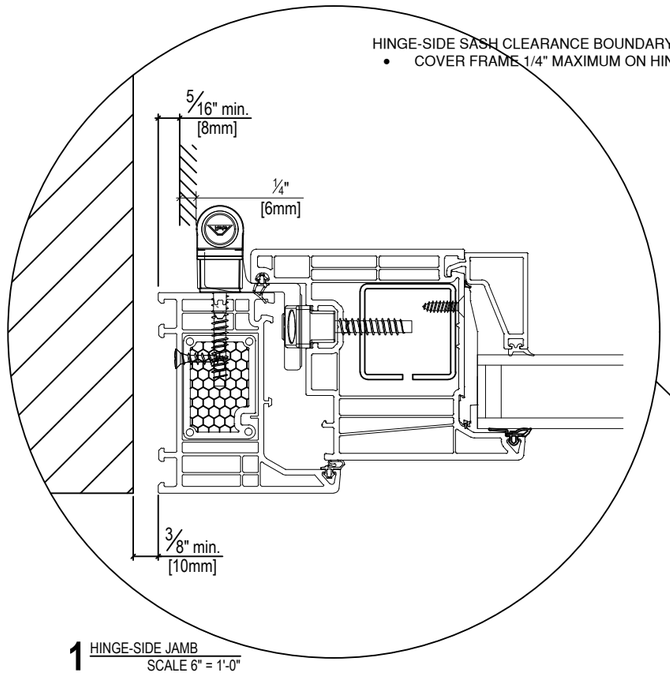

1 HINGE-SIDE JAMB
SCALE 6" = 1'-0"

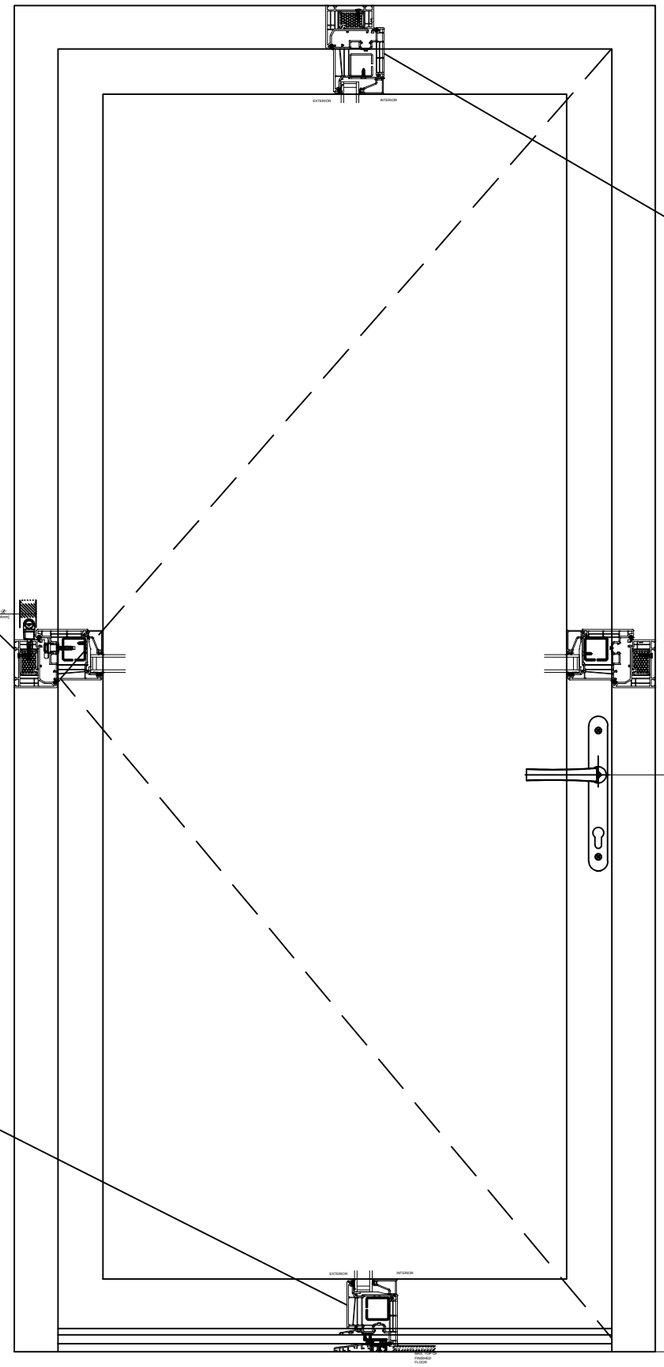


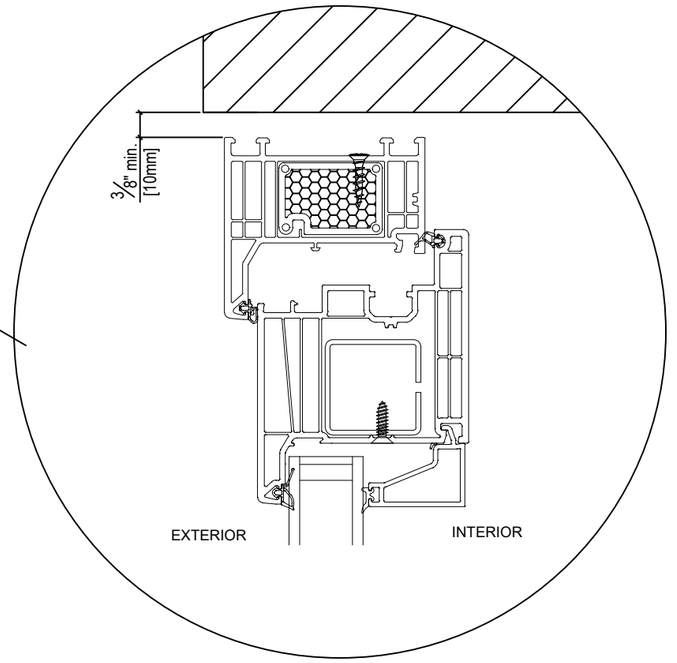

HEAD AND NON-HINGE-SIDE SASH CLEARANCE BOUNDARY
- COVER FRAME 1/2" MAXIMUM AT HEAD AND NON-HINGE-SIDE JAMB

2 SWING DOOR HEAD
SCALE 6" = 1'-0"

SASH CLEARANCE BOUNDARY
- DO NOT COVER ANY PART OF LOW PROFILE THRESHOLD WITH INTERIOR FINISH MATERIALS (FLOORING)

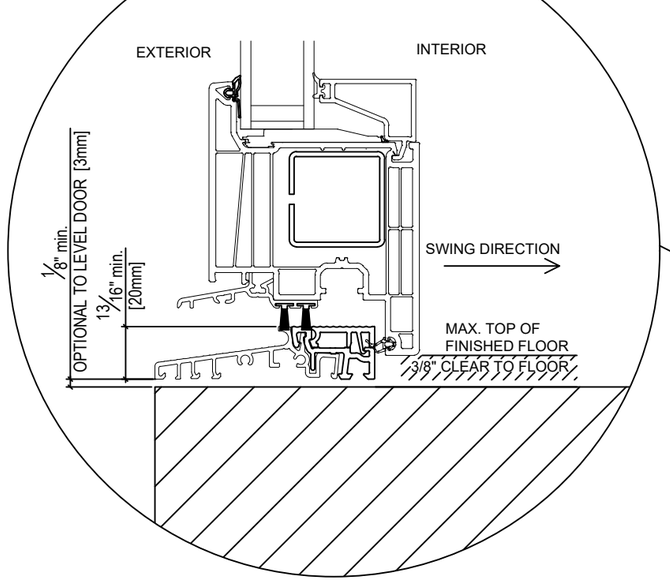

3 LOW-PROFILE SILL CLEARANCE
SCALE 6" = 1'-0"

RO GAP GUIDANCE
- 3/8" RECOMMENDED RO GAP AT JAMBS AND HEAD
- 1/2" RO GAP AT JAMBS AND HEAD IS ACCEPTABLE
- NO WEIGHT CAN BEAR DOWN @ DOOR HEAD
- 1/4" GAPS AT JAMBS ACCEPTABLE FOR THRU-FRAME INSTALLATION
- 1/8" RO GAP AT SILL OPTIONAL FOR LEVELING

ALPEN
HIGH PERFORMANCE PRODUCTS

DRAWING_NAME
TYROL EDGE

SWING-DOOR CLEARANCE

REVISIONS:

NOTES:
- ALL ELEVATIONS REPRESENT OUTSIDE VIEW
- SECTION DETAILS SHOWING TRIPLE GLAZING OPTION. DOUBLE GLAZING ALSO AVAILABLE. REFER TO GLAZING SECTION

DATE:
11/10/2026

PAGE NO.
xx OF xx